


FERROTEC CONFIDENTIAL

- 1).The resistance of the module shall be within 1.352 to 1.652 ohms at an ambient temperature of 25 degrees Celsius.
- 2).The material of the substrates are ALN.

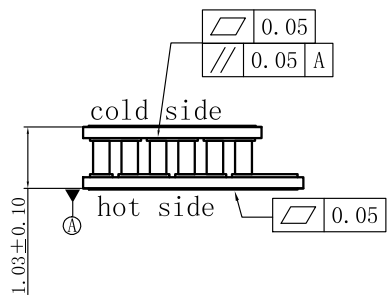

ROHS COMPLIANCE

Item	Value	Test Conditions
I <sub>max</sub>	1.2A	Q <sub>c</sub> =0, DT=DT <sub>max</sub> , Th=50°C
V <sub>max</sub>	2.4V	Q <sub>c</sub> =0, I=I <sub>max</sub> , Th=50°C
DT <sub>max</sub>	76°C	Q <sub>c</sub> =0, I=I <sub>max</sub> , Th=50°C
Q <sub>cmax</sub>	1.6W	I=I <sub>max</sub> , DT=0, Th=50°C
Th <sub>max</sub>	250°C	Momentary

**FerroTec**

General Dimension Tolerance			Pls	Date Modifying	Summary Of Modification	By	Designed	2015/5/4	Finished Mark	Title	Proj.
Process	Cutting	Forging	△				Jiang			28036/018/012MN	3
	Common	Special	△				Yongqing Wu	2015/5/4	Material		
Size Range	less than 6	±0.1	±0.15	±0.5			Approved		Finish	Drawing Number	1/1
	6 up to 30	±0.2						Approved	Raw Material Size		
	30 up to 120	±0.3	±0.2	±0.7			Approved		Raw Material Weight	8B565	Rev. Z
	120 up to 315	±0.5	±0.25	±1.0			Approved				
	315 up to 1000	±0.8	±0.4	±1.5			Approved				
	1000 up to 2000	±1.2	±0.6	±2.0							