


FERROTEC CONFIDENTIAL

- 1) The resistance of the module shall be within 0.218 to 0.265 ohms at an ambient temperature of 25 degrees Celsius.
- 2) Material of lead wires: #20 AWG Type-E Teflon MIL-W-16878E/4.
- 3) The end of the lead wires need be pre-tinned.

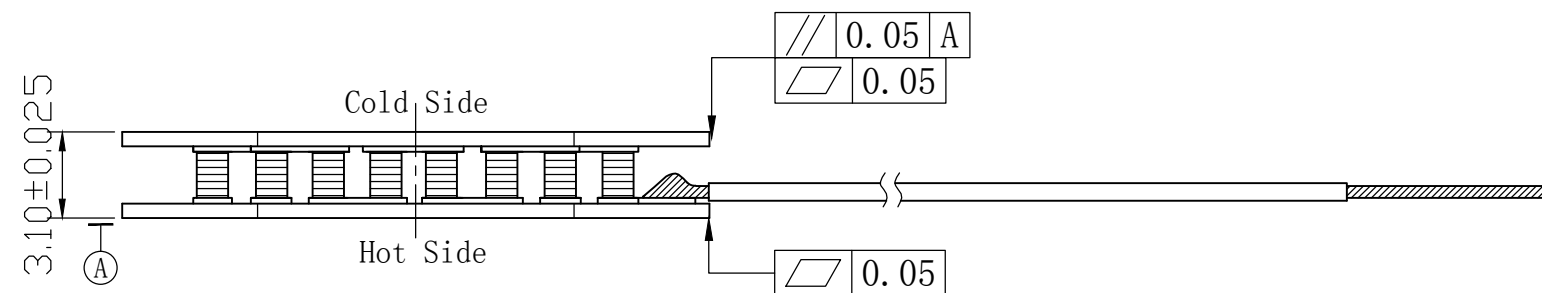

ROHS COMPLIANCE

Item	Value	Test Conditions
I _{max}	6.0A	Q _c =0, DT=DT _{max} , Th=50°C
V _{max}	1.99V	Q _c =0, I=I _{max} , Th=50°C
DT _{max}	83°C	Q _c =0, I=I _{max} , Th=50°C
Q _{cmax}	6.25W	I=I _{max} , DT=0, Th=50°C
Th _{max}	200°C	Momentary

Ferrotec Corporation
 (Zhijiang Factory)
 668# Binkang Road, Hangzhou Hi-tech
 Garden, Zhejiang Province, P.R.China

General Dimension Tolerance			PLs	Date Modifying	Summary Of Modification	By	Designed	2014-6-5	Finished Mark	Title	Proj.
Process	Cutting		Forging				Jiang			20065/014/060B	3
	Common	Special					Common	Checked	2014-6-5		
Size Range	less than 6	±0.1	±0.15	±0.5			Approved		T1406-3700	1/1	
	6 up to 30	±0.2					FTH				Raw Material Size
	30 up to 120	±0.3	±0.2	±0.7			FT		Raw Material Weight	Do Not Scale	
	120 up to 315	±0.5	±0.25	±1.0			FTA				8B331
	315 up to 1000	±0.8	±0.4	±1.5					8B331	Z	
	1000 up to 2000	±1.2	±0.6	±2.0							