



FERROTEC CONFIDENTIAL

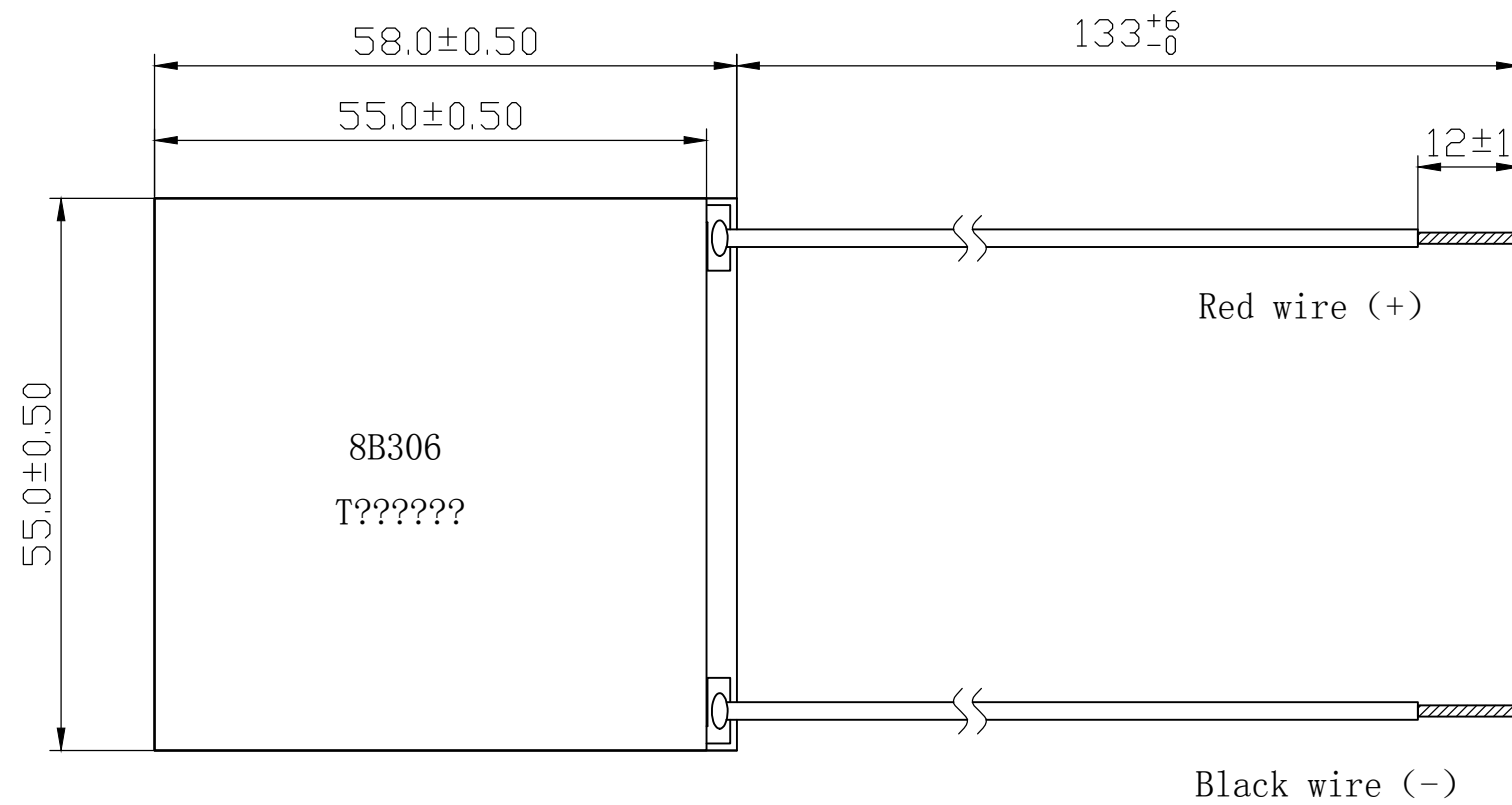

- 1). The resistance of the module shall be within 1.368 to 1.671 ohms at an ambient temperature of 25 degrees Celsius.
- 2). Material of lead wires: #18 AWG MIL-W-16878E/4 Type E PTFE.
- 3). The end of the lead wires shall be pre-tinned.
- 4). Part Number and Lot Number (black color) shall be stamped on cold side.

ROHS COMPLIANCE

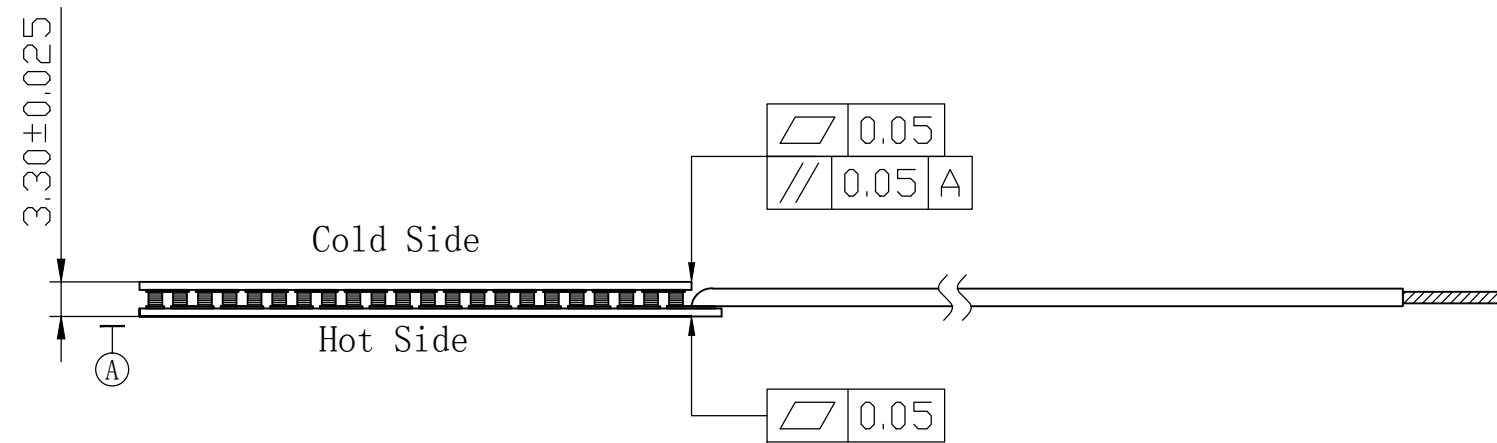

Item	Value	Test Conditions
I _{max}	16.0A	Q _c =0, DT=DT _{max} , Th=50°C
V _{max}	34.4V	Q _c =0, I=I _{max} , Th=50°C
DT _{max}	83°C	Q _c =0, I=I _{max} , Th=50°C
Q _{cmax}	288W	I=2.0A, DT=0, Th=50°C
Th _{max}	200°C	Momentary

Ferrotec Corporation
(Zhijiang Factory)
668# Binkang Road, Hangzhou Hi-tech
Garden, Zhejiang Province, P.R.China

General Dimension Tolerance			PLs	Date Modifying	Summary Of Modification	By	Designed	Finished Mark	Title	Proj.
Process	Cutting		Forging	▲					72018/242/160B	3
	Common	Special								
Size Range	less than 6	±0.1	±0.15	±0.5	▲				Drawing Number	1/1
	6 up to 30	±0.2			▲			T1406-1200		
	30 up to 120	±0.3	±0.2	±0.7	▲				P/N	Scale:
	120 up to 315	±0.5	±0.25	±1.0	▲			8B306		
	315 up to 1000	±0.8	±0.4	±1.5	▲				Do Not	Z
1000 up to 2000	±1.2	±0.6	±2.0	▲				Scale		