


FERROTEC CONFIDENTIAL

- 1). The resistance of the module shall be within 0.481 to 0.587 ohms at an ambient temperature of 25 degrees Celsius.
- 2). The top substrate shall be cold side if connecting the under weld to the positive pole of the power.

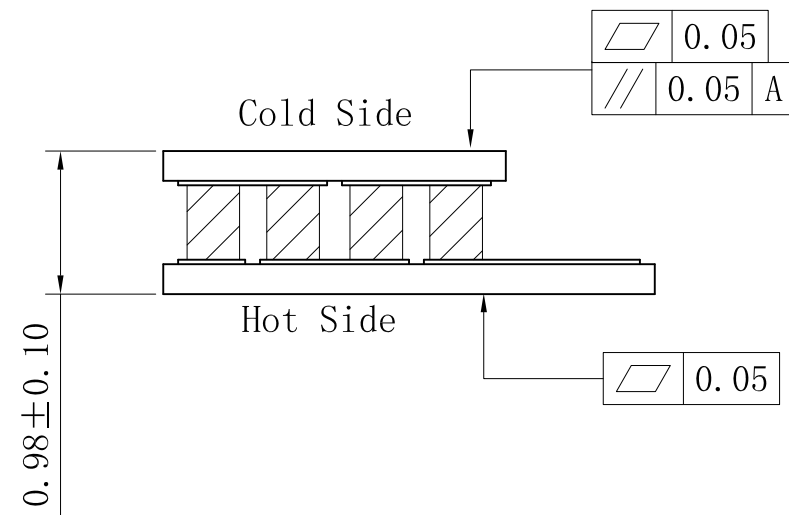

ROHS COMPLIANCE

Item	Value	Test Conditions
I _{max}	1.5A	Q _c =0, DT=DT _{max} 时, Th=50°C
V _{max}	1.1V	Q _c =0, I=I _{max} , Th=50°C
DT _{max}	76°C	Q _c =0, I=I _{max} , Th=50°C
Q _{cmax}	0.9W	I=1.5A, DT=0, Th=50°C
Th _{max}	200°C	



Ferrotec

General Dimension Tolerance				PLs	Date	Summary Of Modification	By	Designed	Finished Mark	Title	Proj.		
Process	Cutting		Forging					Fangliang Hou	2014.6.5	20015/008/015A	3		
	Common	Special	Common					Checked	Material	Angle			
Size Range	Common	Special	Common					Yongqing Wu	2014.6.5	Drawing Number	1/1		
less than 6	±0.1	±0.15	±0.5					Approved		T1406-4000			
6 up to 30	±0.2							FTH					
30 up to 120	±0.3	±0.2	±0.7					Approved		Raw Material Size			
120 up to 315	±0.5	±0.25	±1.0					FT					
315 up to 1000	±0.8	±0.4	±1.5					Approved		Raw Material Weight			
Angel	±5°	±1°	±5°					FTU					
										P/N	8B334	Scale: Do Not Scale	Rev. Z