



FERROTEC CONFIDENTIAL

- 1) The resistance of the module shall be within 0.560 to 0.676 ohms at an ambient temperature of 25 degrees Celsius.
- 2) Material of lead wires: #30 AWG Tinned Single strand.
- 3) All the surfaces of module have been plated gold.

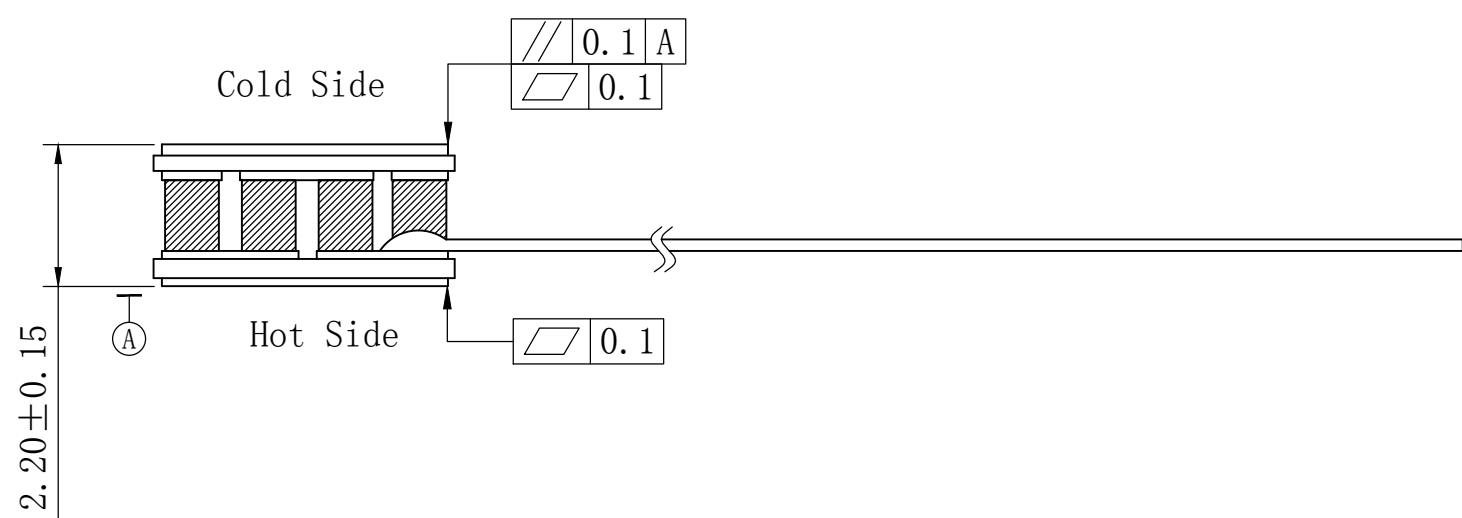

ROHS COMPLIANCE

Item	Value	Test Conditions
I _{max}	1.2A	Q _c =0, DT=DT _{max} , Th=50°C
V _{max}	1.0V	Q _c =0, I=I _{max} , Th=50°C
DT _{max}	80°C	Q _c =0, I=I _{max} , Th=50°C
Q _{cmax}	0.7W	I=I _{max} , DT=0, Th=50°C
Th _{max}	200°C	Momentary

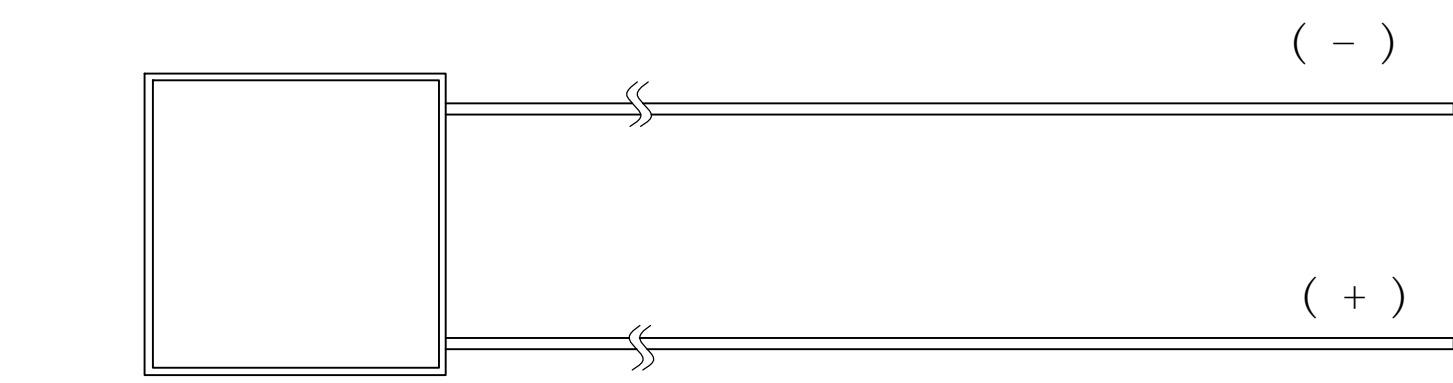

Ferrotec Corporation
 (Zhijiang Factory)
 668# Binkang Road, Hangzhou Hi-tech
 Garden, Zhejiang Province, P.R. China

General Dimension Tolerance			Pls	Date Modifying	Summary of Modification	By	Designed	2014-6-4	Finished Mark	Title	Proj.		
Process	Cutting		Forging				Jiang			20003/007/012M	3		
	common	special	Common				yongqing Wu	2014-6-4	Material			Angle	
Size range									Finish	Drawing Number	1/1		
Less than 6	±0.1	±0.15	±0.5				Approved			T1406-1300			
6 up to 30	±0.2								Raw Material Size				
30 up to 120	±0.3	±0.2	±0.7				Approved						
120 up to 315	±0.5	±0.25	±1.0						Raw Material Weight				
315 up to 1000	±0.8	±0.4	±1.5				Approved						
1000 up to 2000	±1.2	±0.6	±2.0										
										P/N	8B307	Scale: Do not Scale	Rev. Z