



FERROTEC CONFIDENTIAL

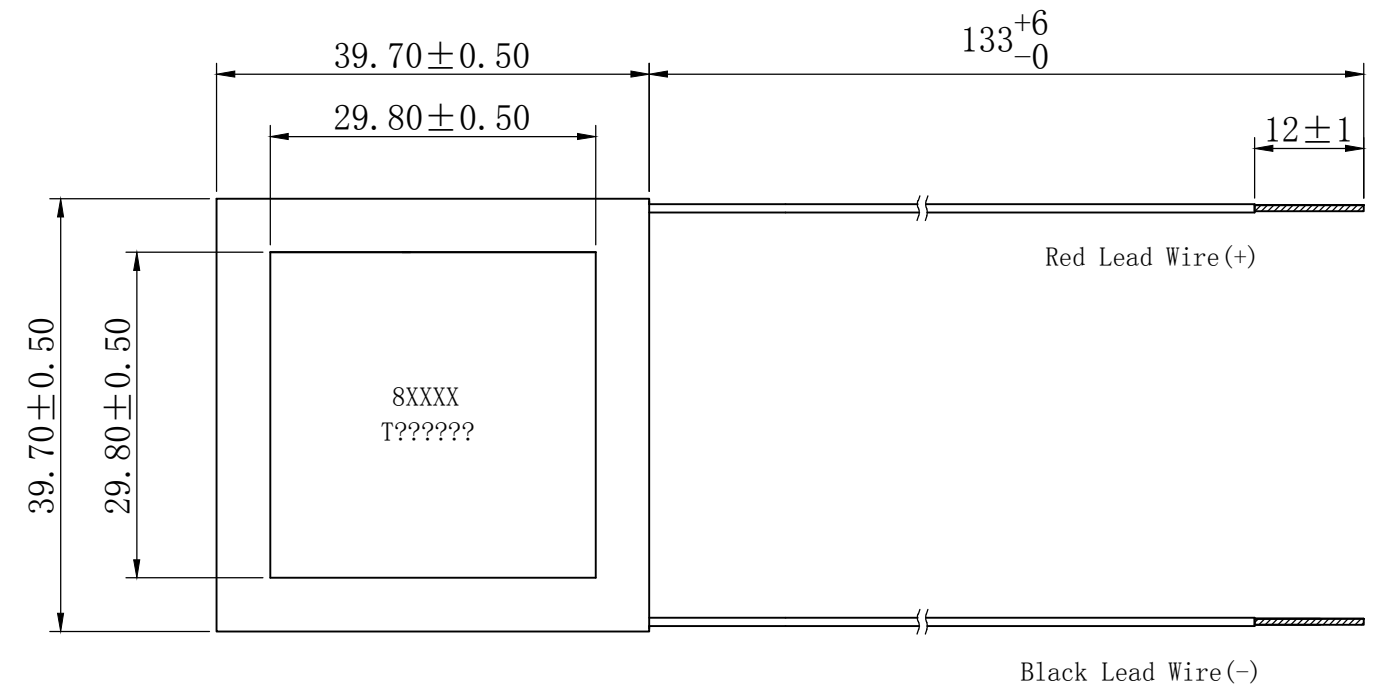

- 1) The resistance of the module shall be within 1.491 to 1.820 ohms at an ambient temperature of 25 degrees Celsius.
- 2) Material of lead wires: #22 AWG Type-E Teflon MIL-W-16878E/4.
- 3) The end of the lead wires shall be pre-tinned.
- 4) Lot Number and Part Number shall be stamped on the cold side with black color.

ROHS COMPLIANCE

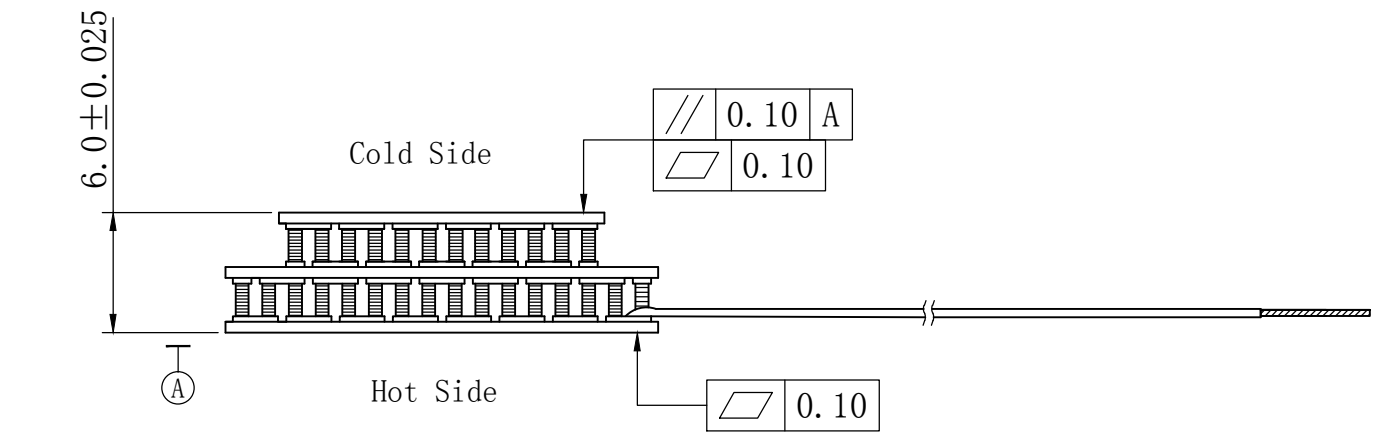

Item	Value	Test Conditions
I _{max}	8.0A	Q _c =0, DT=DT _{max} , Th=50°C
V _{max}	17.8V	Q _c =0, I=I _{max} , Th=50°C
DT _{max}	91°C	Q _c =0, I=I _{max} , Th=50°C
Q _{cmax}	52W	I=I _{max} , DT=0, Th=50°C
Th _{max}	200°C	Momentary

Ferrotec Corporation
 (Zhijiang Factory)
 668# Binkang Road, Hangzhou Hi-tech
 Garden, Zhejiang Province, P.R.China

General Dimension Tolerance				PLs	Date	Modifying	Summary Of Modification	By	Designed	Finished Mark	Title	Proj.
Process	Cutting		Forging	▲							2020/197/080B	3
	Common	Special	Common									
Size Range	less than 6	±0.1	±0.15	▲							Drawing Number	1/1
	6 up to 30	±0.2	±0.2	▲							T1406-2700	
	30 up to 120	±0.3	±0.2	▲								
	120 up to 315	±0.5	±0.25	▲								
	315 up to 1000	±0.8	±0.4	▲								
	1000 up to 2000	±1.2	±0.6	▲								
											P/N	8B321
											Scale:	Rev.
											Do Not Scale	Z