



FERROTEC CONFIDENTIAL

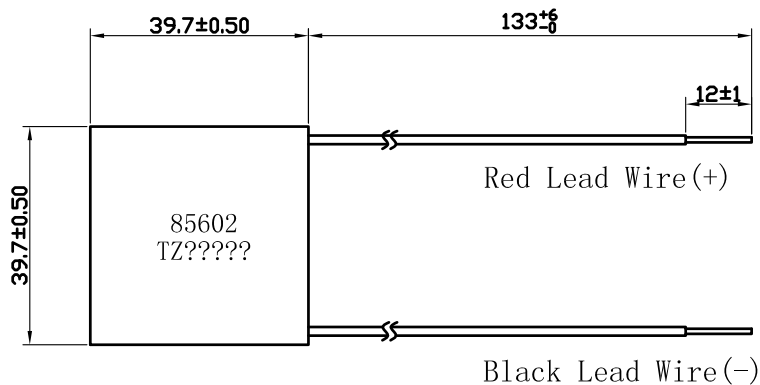

- 1). The resistance of the module shall be within 1.916 to 2.340 ohms at an ambient temperature of 25 degrees Celsius,
- 2). Material of lead wires: #22 AWG Type-E Teflon MIL-W-16878E/4, The end of the lead wires shall be pre-tinned.
- 3). Part Number and Lot Number (black color) shall be stamped on cold side.

ROHS COMPLIANCE

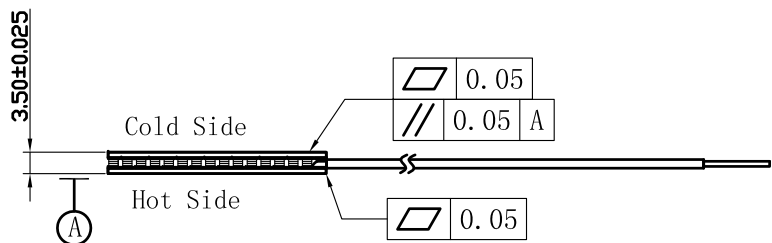

Item	Value	Test Conditions
Imax	6.0A	Qc=0, DT=DTmax, Th=50°C
Vmax	18.1V	Qc=0, I=Imax, Th=50°C
DTmax	83°C	Qc=0, I=Imax, Th=50°C
Qcmax	57W	I=Imax, DT=0, Th=50°C
Thmax	200°C	Momentary

Ferrotec Corporation
 (Zhejiang Factory)
 668# Binkang Road, Hangzhou Hi-tech
 Garden, Zhejiang Province, P.R. China

General Dimension Tolerance				Pls	Date Modifying	Summary of Modification	By	Designed YuFeng Jiang 2013/5/22	Finished Mark	Title 72001/127/060B	Proj. 3
Process	Cuttling										
	Size range	common	special	Common	Checked Yongqing Wu 2013/5/22	Material	Angle				
Less than 6	±0.1							Approved	Finish	Drawing Number T1203-0300	1/1
6 up to 30	±0.2	±0.15	±0.5					Approved	Raw Material Size		
30 up to 120	±0.3	±0.2	±0.7					Approved	Raw Material Weight	P/N 85602	Scale: Do not Scale
120 up to 315	±0.5	±0.25	±1.0					Approved			
315 up to 1000	±0.8	±0.4	±1.5					Approved			
1000 up to 2000	±1.2	±0.6	±2.0					FTA			Rev. Z