



FERROTEC CONFIDENTIAL

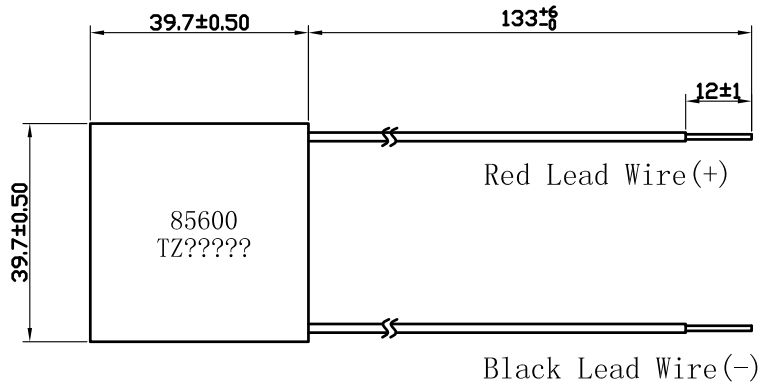

- 1). The resistance of the module shall be within 1.355 to 1.654 ohms at an ambient temperature of 25 degrees Celsius,
- 2). Material of lead wires: #22 AWG Type-E Teflon MIL-W-16878E/4, The end of the lead wires shall be pre-tinned.
- 3). Part Number and Lot Number (black color) shall be stamped on cold side.

ROHS COMPLIANCE

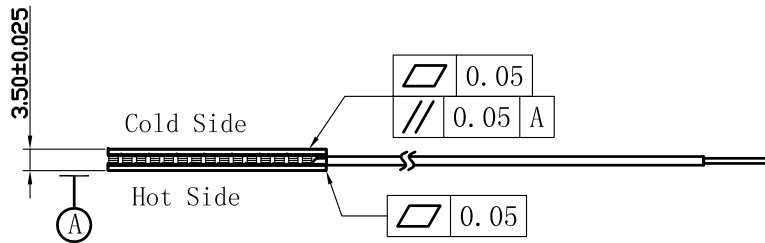

Item	Value	Test Conditions
I _{max}	8.5A	Q _c =0, DT=DT _{max} , Th=50°C
V _{max}	18.1V	Q _c =0, I=I _{max} , Th=50°C
DT _{max}	80°C	Q _c =0, I=I _{max} , Th=50°C
Q _{cmax}	80W	I=I _{max} , DT=0, Th=50°C

Ferrotec Corporation
 (Zhejiang Factory)
 668# Binkang Road, Hangzhou Hi-tech
 Garden, Zhejiang Province, P.R. China

General Dimension Tolerance			Pls	Date Modifying	Summary of Modification	By	Designed	2013/5/22	Finished Mark	Title	Proj.
Process	Cutting		Forging				YuFeng Jiang			72001/127/085B	3
	common	special	Common				Checked		Material		Angle
Size range							Yongqing Wu	2013/5/22		Drawing Number	1/1
Less than 6	±0.1						Approved		Finsh	T1203-0200E	
6 up to 30	±0.2	±0.15	±0.5				FTA			P/N	85600
30 up to 120	±0.3	±0.2	±0.7				Approved		Raw Material Size	Scale:	Do not Scale
120 up to 315	±0.5	±0.25	±1.0				FTA		Raw Material Weight	Rev.	Z
315 up to 1000	±0.8	±0.4	±1.5				Approved				
1000 up to 2000	±1.2	±0.6	±2.0				FTA				