



FERROTEC CONFIDENTIAL

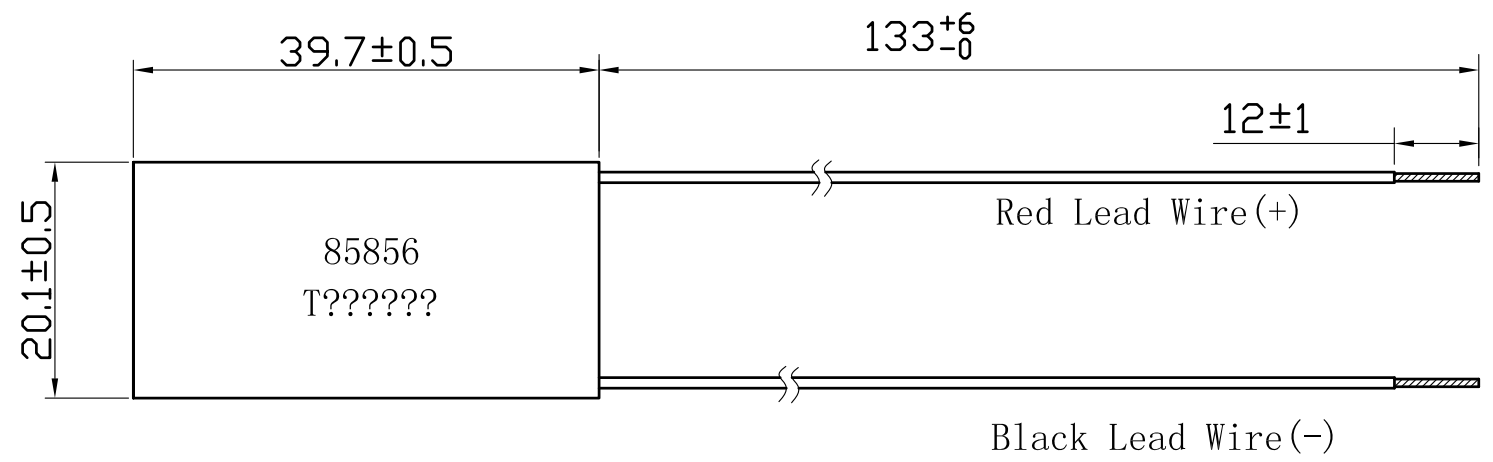

- 1) The resistance of the module shall be within 0.580 to 0.706 ohms at an ambient temperature of 25 degrees Celsius.
- 2) The lead wire material: MIL-W-16878E/4 Type-E, #22 AWG PTFE. The end of the lead wires shall be pre-tinned.
- 3) Lot Number and Part Number shall be stamped on the cold side with black color.

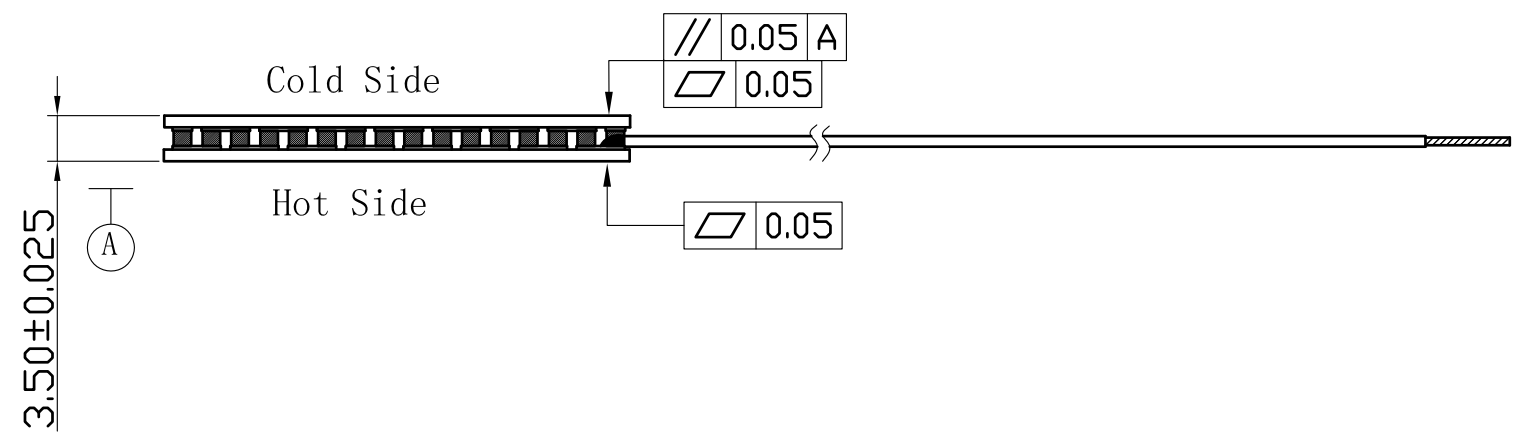

ROHS COMPLIANCE

Item	Value	Conditions
I <sub>max</sub>	10.0A	Q <sub>c</sub> =0, DT=DT <sub>max</sub> , Th=50°C
V <sub>max</sub>	9.0V	Q <sub>c</sub> =0, I=I <sub>max</sub> , Th=50°C
DT <sub>max</sub>	83°C	Q <sub>c</sub> =0, I=I <sub>max</sub> , Th=50°C
Q <sub>cmax</sub>	47W	I=I <sub>max</sub> , DT=0, Th=50°C
Th <sub>max</sub>	200°C	Momentary

**Ferrotec Corporation**  
 (Zhijiang Factory)  
 668# Binkang Road, Hangzhou Hi-tech  
 Garden, Zhejiang Province, P.R.China

General Dimension Tolerance				PLs	Date Modifying	Summary Of Modification	By	Designed	2014-1-10	Finished Mark	Title	Proj.
Process	Cutting		Forging					Jiang	2014-1-10	Material	72011/063/100B	3
	Common	Special	Common					Checked				
Size Range								yongqing Wu	2014-1-10	Finish	Drawing Number	1
less than 6	±0.1	±0.15	±0.5					Approved			T1211-0700	2
6 up to 30	±0.2							FTH		Raw Material Size	P/N	Scale:
30 up to 120	±0.3	±0.2	±0.7					Approved			85856	Rev.
120 up to 315	±0.5	±0.25	±1.0					FT		Raw Material Weight		Do Not
315 up to 1000	±0.8	±0.4	±1.5					Approved				Scale
1000 up to 2000	±1.2	±0.6	±2.0					FTA				Z